

# IDEAL 4315



Convenient, electric guillotine with manual clamp, 430 mm cutting length and 435 mm table depth (for formats up to A3)

Comprehensive SCS safety package: hinged, electronically controlled safety guard on the front table; transparent safety cover on the rear table; main switch and safety lock with key; electronically controlled true two-hand operation; 24 volt control (low voltage); patented IDEAL safety drive; automatic blade return from every position; disc brake for instant blade stop; blade changing device with covered cutting edge; blade depth adjustment from the outside of the machine; easy blade change from the front of the machine without removing covers; cutting stick can be turned or replaced easily from the outside of the machine. Electro-mechanical blade drive. Cuts up to 500 sheets of paper (70 g/m<sup>2</sup>) or bound brochures up to 40 mm. Blade made of German high quality steel. Solid steel blade carrier. Adjustable blade guides made of hardened steel. Patented fast flick action clamp. Precision side lay. Spindle guided backgauge with hand crank. Digital measurement readout for backgauge positioning (cm or inches). Optical cutting line with bright and durable LEDs. Solid all-metal construction. Designed as table top machine, a stand or a cabinet with storage shelf are available as an option. Power supply: 230 V / 50 Hz / 1~ (other voltages available), Motor performance (input capacity): 0.45 kW, Dimensions (H x W x D): 360/1055<sup>1</sup>/1080<sup>2</sup> x 640 x 880 mm, Weight: 81/91<sup>1</sup>/113<sup>2</sup> kg (<sup>1</sup> with stand, <sup>2</sup> with cabinet), Colour: pearl grey.

## TECHNICAL DATA

Cutting length	430 mm
Cutting height	40 mm
Narrow cut	35 mm
Table depth	435 mm



IDEAL 4315 with optional cabinet




IDEAL.DE

# IDEAL 4315

## Features



**DIGITAL MEASUREMENT** Precise backgauge positioning with the hand crank is very easy due to the digital measurement readout, which can be switched over from cm to inch.

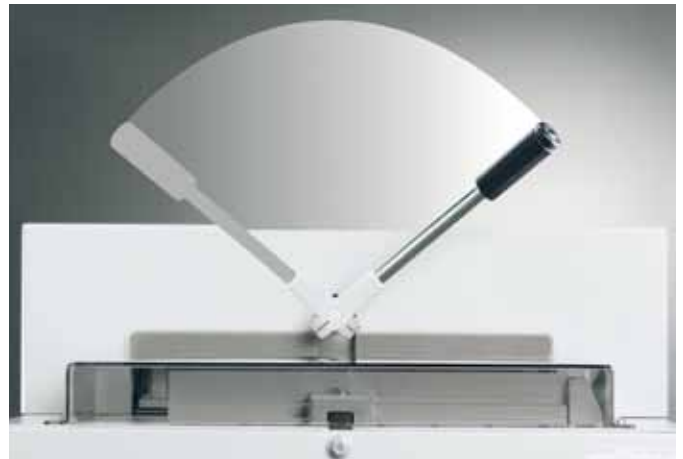

**FAST FLICK ACTION CLAMP** Efficient cutting is guaranteed by the fast flick action clamp. Insert paper stack, throw the lever to tighten – cut.



**BLADE CHANGING DEVICE** Safe and convenient blade change without removing machine covers: blade changing device with covered cutting edge.



**CUTTING STICK CHANGE** On our office guillotines the cutting stick can be turned or replaced easily from the outside of the machine.



The technical data are approximate. Subject to change. 06/2011

EDNord - Istedgade 37A - 9000 Aalborg - Telefon 9633 3500



L.T.E. Listed 802 D