

HeatSeal™ ProSeries 4500LM

With many of the same features and benefits of the 3500, the 470mm throat width of the 4500 is ideal for '2-up' A3 brochure/report cover work or A2 Posters and Pop-Up's.


The ability to laminate signs, display materials and posters up to A2 brings pouch lamination even closer to the Graphics profession opening up an entire new sphere of application opportunities.

- Lamination width* from ID size to **A2 Max** (470 mm), up to 2 x 300 Mic. (**600 Total**)
- **Hot Roller heating Technology:**
2 x Hot Rollers plus Plate plus 2 x Pressure Rollers
- Max. Laminating Thickness – 3.5 mm
- Warm Up time – 4 to 8 minutes depending upon setting
- Robust and heavy duty metal construction

* Lamination Width is the maximum insert width

Features & Benefits

- Digital Display with 9 speed settings**
Give Users pre-set modes for popular applications as well as finger-tip control over speed and temperature settings for accurate media-pouch compatibility
- Hot Roller Heating Technology:** for a better result
- Heavy duty metal construction**
- Speed control:** variable Speed max 800 mm/min to min 160 mm/min
- Temperature: 5 pre-set settings**
 - 0°
 - 80°
 - 110°
 - 130°
 - 150°
to adjust temperature for each application
- Reverse Mode:** Anti-jam function to solve any miss-feeding problems
- 470mm Throat width**
Gives full A2 Lamination possibilities
- Pre-heat function**

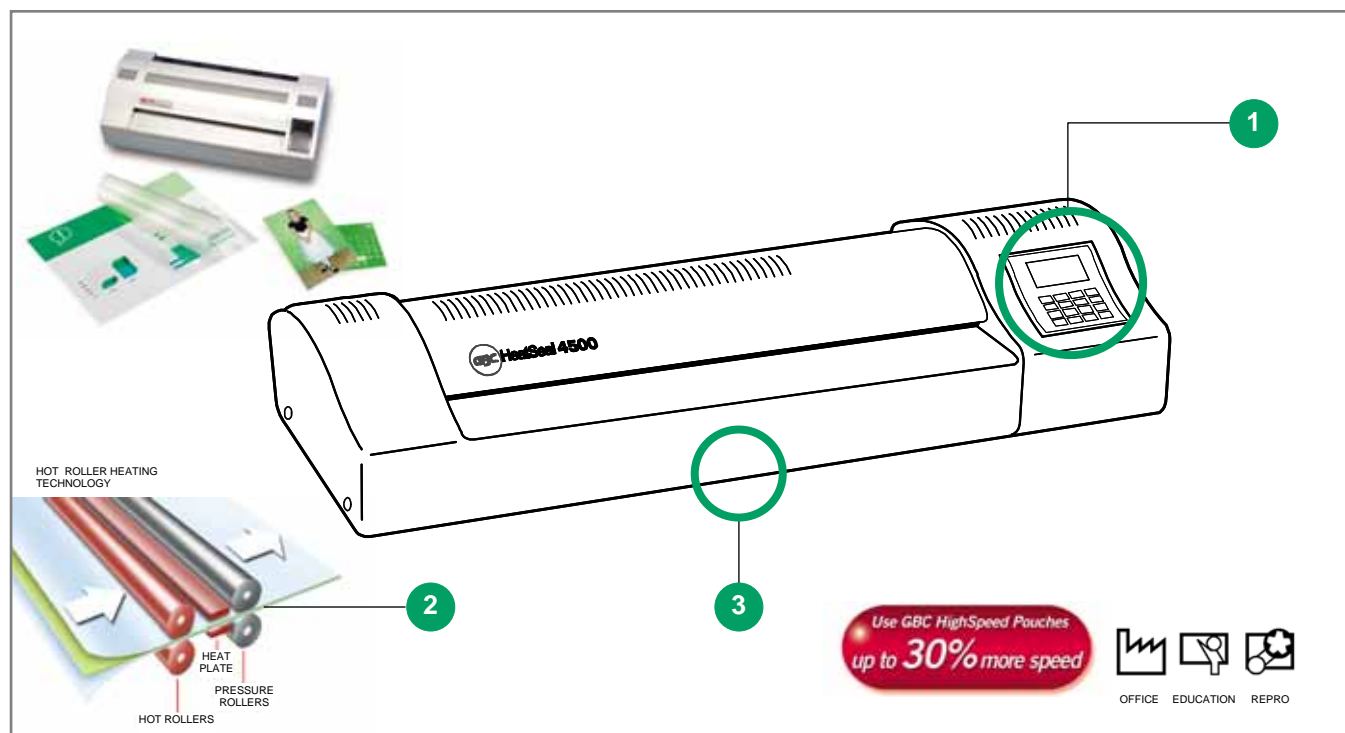

Technical Specifications

Photo quality	Yes
Heat-up Time (75 mic)	2.5 - 8.5 min
Speed mm/min.	190-1500
Temperature control	Variable (Display)
Cold Lamination	Yes
Speed control	Variable/6 std settings
Rollers	4 + Heated Plates
Max. Document size	A2
Max. pouch thickness	2x300 Micron (600 Total)
Ready Lamp	On display
Ready Glow	-
Release Function	-
Reverse	Yes
Display	Yes

Pouch counter	-
Auto switch off	-
Time to laminate	12 sec
1 Standard A4 Pouch	
A4 Laminates / hr*	297
Time to laminate	9 sec
1 High Speed Pouch	
High Speed Pouches	Yes
Laminates / hr*	417
Warranty	2 years
Dimensions	673x318x178
Certification	GS / TÜV / CE
Weight	22 kg
Power Consumption	1500W/6.8A
Watts / Amps	

* Estimates only

GBC reserves the right to modify specifications without notice.

Product Codes:

EU 1700520
UK 1700530



www.gbceurope.com