



HeatSeal[™]H210


The A4 'Standard'

With a 241mm 'throat' caters to the popular Office/A4 production 'standard' – certificates, notices, brochures, presentation pages, diplomas, reference lists, menus, etc.

- Lamination width* from ID size to A4 Max (241 mm)
- Pouch capability 2x 75 (150 Total), 2 x 100 (200 Total)
 2 x 125 (250 Total) Micron
- Carrier-free performance
- 2 x 'Heated Roller' Technology
- Variable Temperature + 'Cold' setting
- Up to 65 A4's per hour capacity

Features & Benefits

- 1 Variable temperature: For photo quality
- Exit Tray Keeps the laminated product straight on exit minimising curling and warping
- 3 Release lever: Anti-jam function to solve any miss-feeding problems
- 4 'Ready Glow' Throat Using the 'Traffic Light' principle, it glows green when correct operational temperature is reached and red when the temperature is still adjusting to the setting.
- 5 Auto switch off after 1 hour
- 6 Only 5 minutes 'Warm up' period

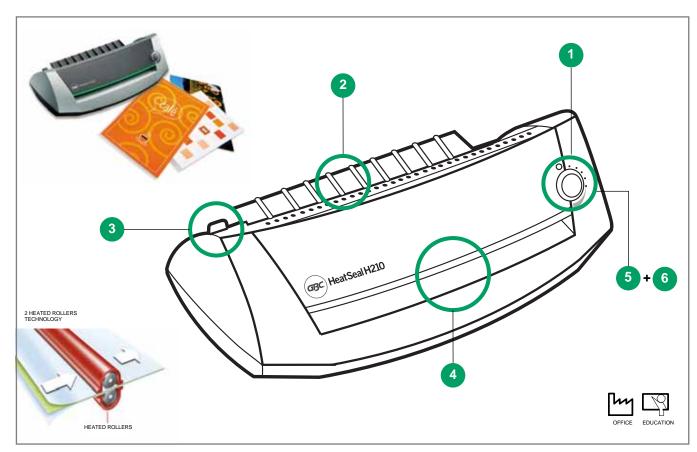

Technical Specifications

Photo quality	Yes
Heat-up Time (75 mic)	5 min.
Speed mm/min.	330
Temperature control	Variable
Cold Lamination	Yes
Speed control	Fixed
Rollers	2
Max. Document size	A4
Max. pouch thickness	2x125 Micron (250 Total)
Ready Lamp	-
Ready Glow	Yes
Release Function	Yes
Reverse	-
Display	-

Pouch counter	-
Auto switch off	Yes, after 1 hour
Time to laminate 1 Standard A4 Pouch	55 sec.
A4 Laminates / hr*	65
High Speed Pouches Laminates / hr*	No
Warranty	2 years
Dimensions	400x173x117
Certification	GS / TÜV / CE
Weight	2.7 kg
Power Consumption Watts / Amps	500W/2.2A

- * Estimates only

Product Codes: EU 1702550 UK 1702560



www.gbceurope.com

^{*} Lamination Width is the maximum insert width